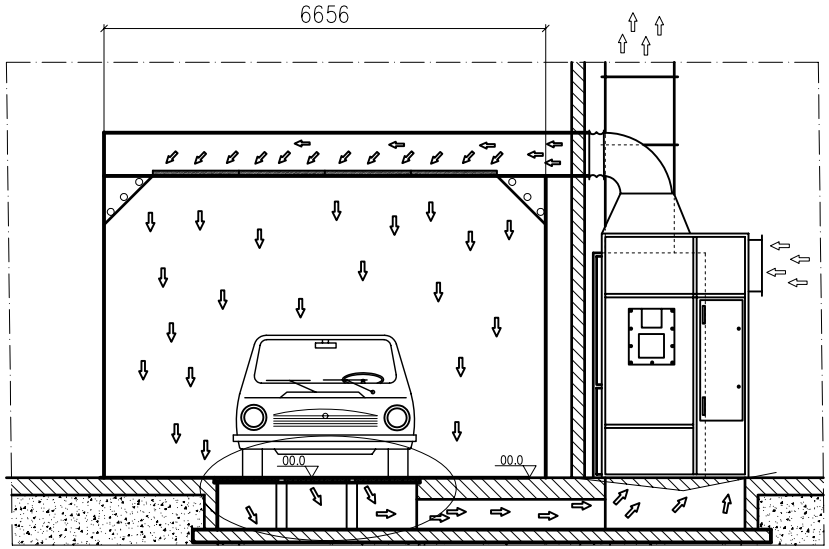

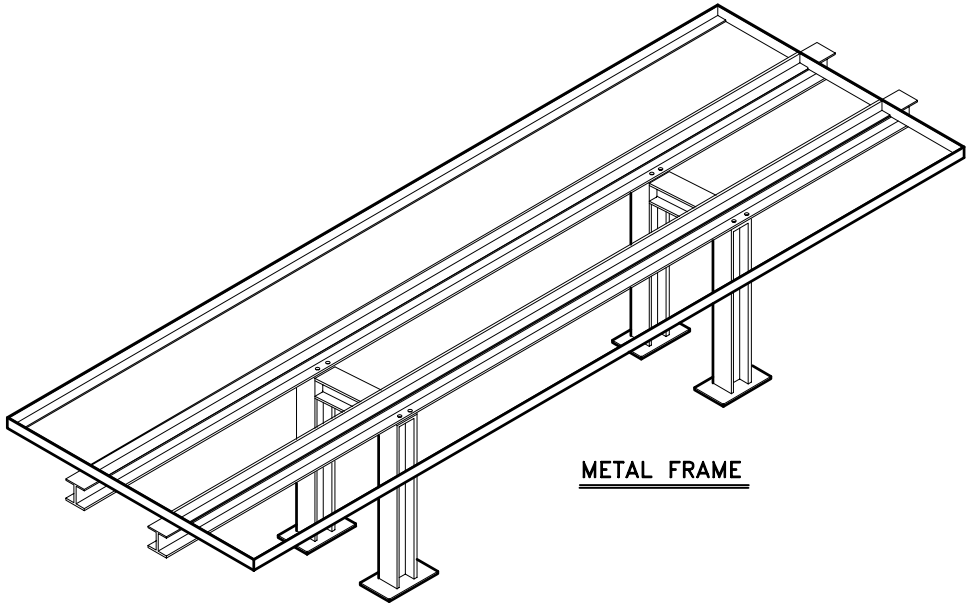

METAL FRAME

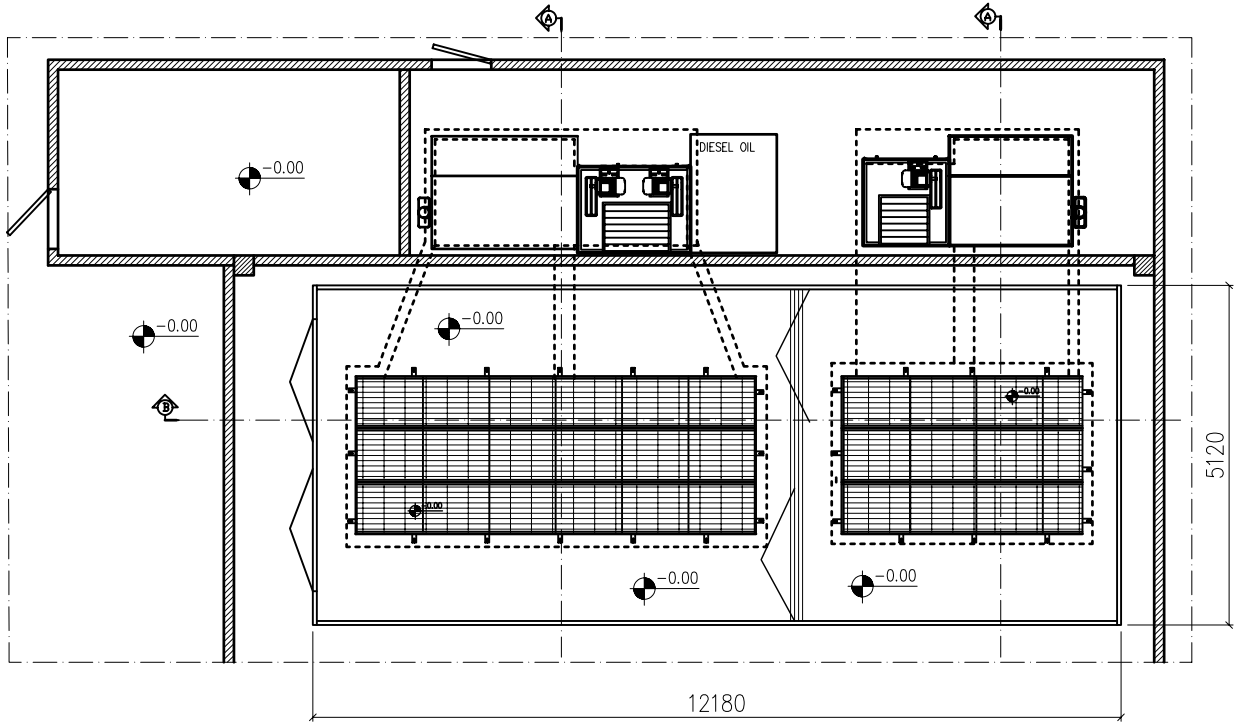

In order to carry out the structures to be installed inside the spray booth's pit,enclosed please find the concrete works related to the metallic carpentry.

NOTICE CONCERNING THE METALLIC BASEMENTS

The pits include the tolerances which make plant's assembling possible once the installation is accomplished.Such rooms have to be sealed by the customer after the end of installation. The pits' depth for the housing of the metallic basement,could also turn to be 1+2 cm deeper than the indicated measures,but we advise not to make them less deeper,otherwise the metallic basement once it is installed,could turn to be protruding compared to the floor.

** Any dimensioning of beams and ceiling is to be considered as indicative.We remind you that the calculation of the structural elements is to be charged to the customer and has to be carried out taking into consideration the traffic load of the customer himself besides the national rules,coefficientes and local regulations.Moreover we suggest carryng out the bearing plane of the spray booth wholly on level groud in order to make the assemling easier and to guarantee a perfect functioning.

Cliente Customer	SISTEMA VERNICIATURA								
Oggetto Tavola Sheet subject	CABINA VERICIATURA A CIRCOLO DI ARIA								Formato Size A1
Disegno Design	CODICE	UK Unità	mm	Tavola Sheet	1	Revisione Revision	0	Scala Scale	1:1	Disegnatore Designer	DIS.	Data Date	gg.mm.aaaa
REV.	DATE	DESCRIZIONE / DESCRIPTION											
1	14.05.04	Prima emissione											

Copyright di Sisteme Verniciatura. Il Sistema Verniciatura ha registrato il Sistema Verniciatura a Circolo di Aria e il Sistema Verniciatura a Circolo di Aria Contenuto.
Questo disegno è proprietà esclusiva ..... Qualsiasi uso ed utilizzo senza l'autorizzazione della stessa costituisce causa perseguibile a norma di legge